

# ***ROADKING®***

## **RKING940**

PREMIUM NOISE-CANCELING

**BLUETOOTH®** HEADSET

CASQUE D'ÉCOUTE **BLUETOOTH®** ANTIBRUIT  
DE PREMIÈRE QUALITÉ

**Owner's Guide**

**RKING940**

## **1 | NOTICE BEFORE USING**

Thank you for purchasing the RoadKing® BLUETOOTH® Headset RKING940. Please read this User Manual completely before using the headset.

RKING940 is based on the latest BLUETOOTH wireless technology and is compliant with BLUETOOTH v4.1 specifications. Csr's latest CVC technology for narrowband and wideband voice connections including wind noise reduction. It is capable of connecting with a BLUETOOTH enabled device.

## 2 | SPECIFICATIONS

BLUETOOTH Specifications:	v4.1+EDR
Operation Frequency:	2.402-2.48GHz
Supported Profile:	HSP, HFP, A2DP
DSP Available:	CBC, WBS, SBC, Mp3, AAC, APTX
Operation Range:	33 ft. indoor and up to 66 ft. outdoor
Talk Time:	30 hours
Standby Time:	900 hours
Battery Type:	120mAh, 3.7V, Lithium Polymer Battery
Charge Time:	3 hours
Weight:	73g
Power Supply:	5.0V DC and 110-240V AC Adapter
Operating Temp:	32 to 122°F
Storage Temp:	14 to 140°F


### 3 | PACKAGE CONTENTS LIST

Please inspect this package and refer to the package contents list below to verify all items were included in this package.

A. RKING940 RoadKing BLUETOOTH Headset.....	1
B. AC Wall Charger .....	1
C. DC Car Charger .....	1
D. USB Charging Cable .....	1
E. User Manual .....	1
F. Extra Ear Pad and Mic Cover.....	2

## 4 | RKING940 *BLUETOOTH*® HEADSET OVERVIEW

1. Adjustable Headband
2. Speaker/Ear Pad
3. Volume (+)
4. Volume (-)
5. Flexible Arm
6. Windproof Microphone Boom
7. Indicator Light (LED)
8. On/Off Button
9. Charging Socket

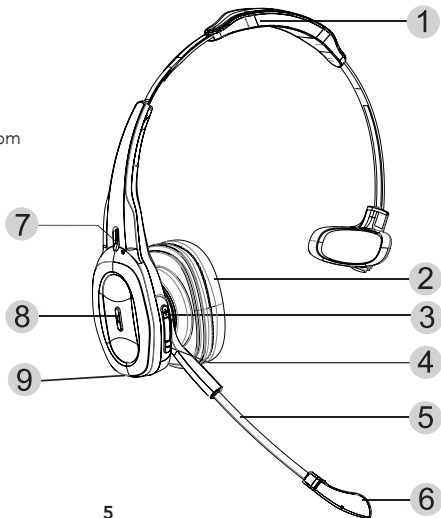

## 5 | BATTERY INFORMATION

The device is equipped with an integrated lithium-polymer battery. The battery cannot be replaced. Do not attempt to remove the battery from the device since it would damage the device. The full performance of a new battery is not achieved until after two or three complete charge/discharge cycles. The battery can be charged and discharged several hundred times, but it loses its capacity over time.

Disconnect RKING940 from the power supply as soon as the battery is fully charged; overcharging could reduce the service life of the battery. A charged battery will lose its capacity if it is not used on a regular basis. Important: Ensure that the battery is fully charged if you do not use the device for a long period of time. To avoid a complete discharge of the battery, the RKING940 should be charged at least every 3 months.

## 6 | CHARGING THE BATTERY

RKING940 is operated with a rechargeable battery. Charge the battery completely before its first use. Read the previous section "Battery Information" before starting the charging process.

1. Connect the charger to the correct outlet.
2. When the charger is connected to the headset, the Red indicator light will turn on. Charging the battery fully may take up to 3 hours.
3. When the battery is fully charged, the Red indicator light will turn Blue. Disconnect the charger from the headset and the outlet. The headset is ready to use.

### NOTE:

- For the first use, please charge the headset fully.
- The fully charged battery has power for up to 30 hours of talk-time and music streaming, and up to 900 hours of standby time. However, the talk and standby times may vary when used with different cellular phones or other BLUETOOTH® devices. When the battery is low, you will hear a voice prompt "Battery Low" every 20 seconds, and the red indicator light will flash.

## 7 | PAIR TO YOUR **BLUETOOTH®** ENABLED DEVICE

Before you use your headset for the first time you must pair the unit with a BLUETOOTH enabled device. Pairing is a one-time process and required only for the first connection with the BLUETOOTH enabled device. RKING940 can be paired with up to eight devices and can be connected simultaneously with two devices.

### **General procedure:**

1. Keep RKING940 within range of a BLUETOOTH enabled device (no more than 3 feet).
2. The headset must be turned off.
3. Hold the On/Off button for approximately 5 seconds until you hear two beeps and the indicator light intermittently flashes Red and Blue. The device is now in pairing mode. The first time the headset is turned on, pairing mode should engage automatically.
4. Find the BLUETOOTH settings and search your device list.
5. From the device list, select "RKING940"
6. If required, enter the PIN code "0000" and confirm the entry. If the pairing was successful, you will hear the voice prompt "Pairing successful" and the indicator lights Blue for 3 seconds. (Note: The PIN code is preprogrammed and cannot be changed.)



7. After pairing, RKING940 will automatically connect with the device. For some devices you have to manually confirm the connection. Once paired, the headset will change to standby mode and the indicator light will flash Blue every 5 seconds

## 8 | MULTI-CONNECTION FUNCTION

The multi-connection function allows for the simultaneous use of RKING940 with two devices.

### **Establishing a connection with two devices:**

There are several options of connecting RKING940 with already paired devices.

1. **Automatic connection:** When turning on RKING940, a connection is automatically established with the two most recently connected devices.
2. **Establishing a connection via RKING940:** To manually establish a connection between RKING940 and the two most recently connected devices, press the On/Off button. RKING940 first connects itself with the first connected device. It then connects itself with the most recently connected device.

- 3. Establishing a connection via the device:** If the device is not one of the two most recently connected devices with RKING940, you have to establish the connection via the BLUETOOTH® menu on that device. After connected successfully, you can establish another connection with a second device. This allows you to determine the sequence of connections. If two devices are connected with RKING940, the device connected first is the first device, and the other one is the second device. Another connection can be established only after first disconnecting one of the two devices. The device that is still connected afterward become the first device in the sequence.

NOTE: Voice dialing is available only for the first device and the operation for redialing the last number differs for the first and second device. The other functions are executed the same way using RKING940 as a connection with only one cellular phone.

## 9 | TURNING HEADSET ON/OFF

**Turning on your headset:** While the headset is turned off, press and hold On/Off for 3 seconds until you hear the voice prompt "Power on." The headset is now on. The Blue indicator light will be solid for 2 seconds.


**Connecting to a BLUETOOTH® device:** Once your headset has completed the pairing process successfully, and the headset is turned on, it will connect to the phone you last connected with automatically ("Beep"). Please ensure your device's BLUETOOTH function is turned on.

**Turning off the headset:** At any working state after the headset is powered on, press and hold On/Off for 5 seconds. You will hear the voice prompt "Power off" and the Red indicator light will be solid for 2 seconds. The headset has now powered off.

**NOTE:** To conserve power, if the headset is no connected to a device for approximately 10 minutes, the headset will turn off automatically.

## 10 | WEARING YOUR HEADSET

According to your preference, you can wear the headset on your left or right ear. The adjustable headband design allows for a comfortable fit.



## 11 | USING RKING940

### Making a call:

- **Using device:** In standby mode, dial the number on your device to make a call
- **Using voice dialing:** In standby mode, press the On/Off button quickly. You will hear a short tone from the headset, and your device will prompt you to say the voice tag which you have already attached to your contact. If the voice tag is identified by the device, the related number will be dialed. Please ensure that your device supports this voice-dialing function, and the voice tags have been set up on your device prior to attempting this. Refer to your device's user guide or contact your service provider.

NOTE: Voice dialing is available only for the first device, if two devices are connected.

- **Last number re-dialing:** In standby mode, press the On/Off button twice. The last number you dialed will be re-dialed.

NOTE: If two devices are connected with RKING940, hold the Volume (–) button for 2 seconds to dial the last number on the device connected previously.

**Answering a call:** When you receive an incoming call, press the On/Off button to answer; you can also say "YES" using the voice recognition feature of RKING940.

**Rejecting a call:** When you receive an incoming call, press and hold the On/Off button for 3 seconds to reject the call.

**Transferring a call:** While a call is in progress, press and hold Volume (+) for 3 seconds. The call will be transferred from your phone to your headset. Repeating the operation can transfer the call from your headset back to your device.

**Ending a call:** While on a call, press the On/Off button to end the call; you can also end the call directly from your phone.

**Call-Waiting (Three-Way Calling):** Before using the Call-Waiting function on your headset, please ensure that your phone supports this hands-free profile and you have access by a service provider.

- If there is an incoming call while a call is in progress, press On/Off quickly. This will accept the waiting call and end the current call.
- If there is an incoming call while a call is in progress, press and hold On/Off for 3 seconds to accept the incoming call and place the current call on hold.

- While a call is on hold and you are on another call, press On/Off quickly to end the current call and resume the call holding.
- While a call is on hold and you are on another call, press and hold On/Off for 3 seconds to shift the current call to hold and connect you with the previously held call.
- While you are engaged in one call with another call on hold, press Volume (–) button twice to add the held call to the current conversation to make a three-way call.
- While you are engaged in a three-way call, press On/Off twice to end all calls.

**Volume control:** While on a call, you can adjust the volume by pressing the Volume (+) or Volume (–) button, or you can adjust the volume directly from your phone.

**Mute:** While a call is in progress, press and hold the Volume (–) button for 2 seconds; you will hear a tone from low to high. The headset's Mic is now muted. You will hear a tone every 10 seconds, notifying you that your Mic is still muted and a call is still in progress. Repeat the operation and you will hear the tone from high to low. The mute function is now canceled.

**Music streaming:** RKING940 supports A2DP profile that allows for wireless streaming of music from a BLUETOOTH enabled device. Music will pause while a call is dialed or received, and resume when the call has ended.

## 12 | RESET RKING940

RKING940 can be paired with up to eight devices. You can delete the pairing list and reset the headset to the factory settings by doing the following:

- The headset must be turned on and not be connected to any device.
- Press and hold the On/Off, Volume (+) and Volume (-) buttons simultaneously for approximately 5 seconds until the indicator light flashes Red 3 times. If the pairing list was deleted, the headset will return to standby mode without connection.

## 13 | SAFETY AND GENERAL INFORMATION

1. Please read this User Manual carefully and follow all instructions.
2. To avoid any damage or malfunction of the device, do not drop the device from high places.
3. Keep device away from humidity, water and any other liquid. If the device is exposed to water, moisture or other liquids, do not operate it to avoid any electrical shock, explosion and damage to the device or yourself.



4. Do not place or keep this device near any heat source, such as direct sunlight, radiators, stoves or other apparatus that produces heat. This may cause an explosion, degrade the performance and/or reduce battery life.
5. Do not modify, repair or disassemble device (especially the battery). Doing this will void the warranty.
6. Do not place heavy objects on the device.
7. Use only the supplied and approved chargers.
8. Please contact RoadKing for replacement or support of this product.
9. Unplug this device when unused for long periods of time or during lightning storms.
10. The battery used in this device may present a risk of fire or chemical burn if mishandled.

## **14 | FCC & IC STATEMENT**

Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

NOTE: The manufacturer is not responsible for ANY interference, for example RADIO or TV interference, caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

## 15 | WARRANTY

This 1 Year Limited Warranty from RoadKing, a DAS Company applies to all electronic products and devices manufactured by RoadKing and sold under the brand name RoadKing. Visit [www.roadkingproducts.com](http://www.roadkingproducts.com) for warranty details.

Terms of the Warranty: RoadKing warrants that the product you have purchased from a DAS authorized retailer is free from defects in materials and workmanship under normal use during the warranty period (1 year). The warranty period begins on the day of retail sale. This warranty extends only to the original purchaser. It is not transferrable to anyone who subsequently receives the product. It excludes all expendable parts (fuses, filters, bulbs, etc.) During the warranty period RoadKing will repair your defective product, replace it with an identical item, or at our option exchange it for an equivalent product of value and performance. This Limited Warranty does not extend to any product that has been damaged or rendered defective as a result of: an accident, misuse or abuse, as a result of an act of God, by operation outside the usage parameters stated in this manual, by modification of the product, attempted repair, or as a result of war or terrorist attack. Other limitations of this warranty exclude: payment for your lost time, loss of use of your product, or property damage caused by the product or its failure to work, or any other incidental or consequential damages including personal injury. Except as expressly set forth in this warranty statement, RoadKing makes no other warranties expressed or

implied.

Defective products must be returned to the dealer within 30 days. After 30 days, the product may be returned to RoadKing.

When returning products to RoadKing: Shipping to RoadKing shall be prepaid; your replacement will be mailed back to you at no additional charge. Carefully pack product and all included accessories into a suitable box, along with original dated register receipt or invoice, a letter stating the defect, daytime phone number, and a physical address. (UPS will not deliver to a PO Box.)

- Any package with a PO Box address will not be processed, and will be held until further notification from you.
- Make sure you can track your shipment to us. RoadKing will not be responsible for lost packages.
- RoadKing will not be responsible for damage incurred during shipment to us.
- Failure to provide a dated proof of purchase will invalidate warranty.

Ship to: RoadKing Returns, 48 Industrial Road, Elizabethtown, PA 17022

For customer assistance and technical support call 1-866-622-7979 Monday through Friday

8:00am to 5:00pm Eastern Time. Or write to : [support@dasinc.com](mailto:support@dasinc.com)

RoadKing® and RoadPro® are registered trademarks of DAS Companies, Inc. The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by DAS Companies, Inc. is under license. All other trademarks registered trademarks, copyrights and logos are the property of their respective owners. ©2018 DAS Companies, Inc. and/or affiliates.